


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-10-30	




Specification

Rated Voltage: 50V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 500Megohms/Min.
Dielectric Withstanding: 500V AC
Operating Temperature: -25°C~+85°C
Plastic Material: PA6T+30%GF, UL94V-0,
Contact Material: Phosphor Bronze/Brass
Finish: Tin Plated

Ordering information

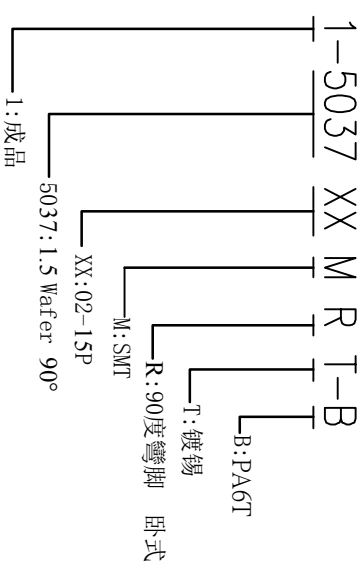

pin	A	B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	10.50
6	7.50	12.00
7	9.00	13.50
8	10.50	15.00
9	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50

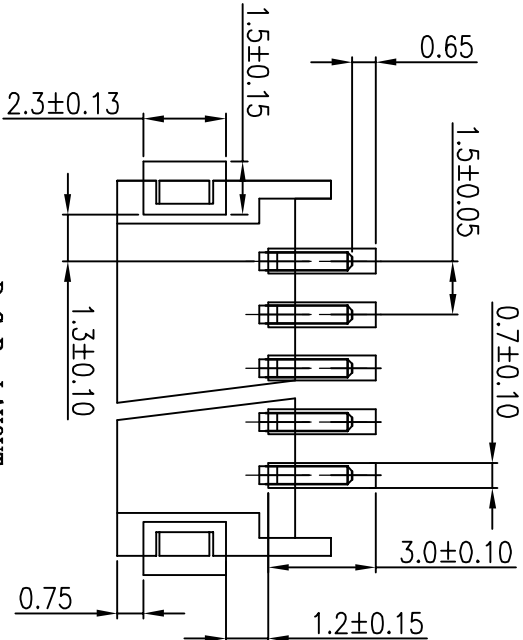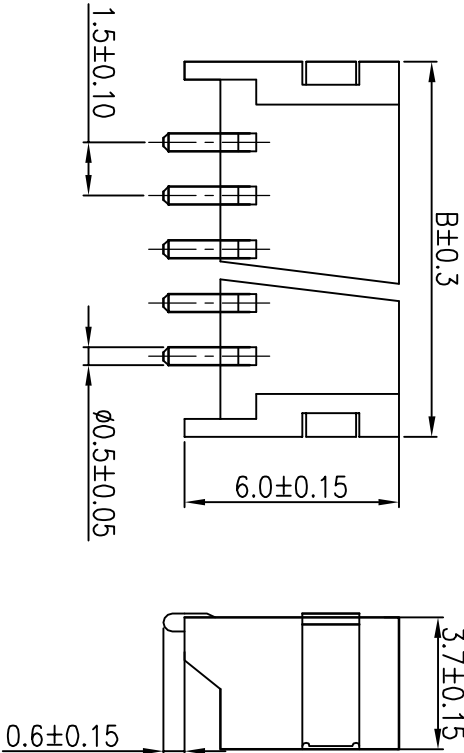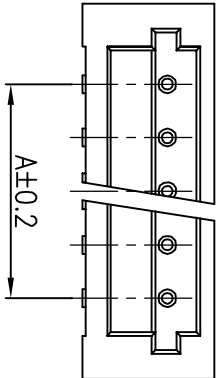

P.C.B LAYOUT

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5037XX-B	1.5mm薄膠1xNP,薄膠高6.0(PA6T)	1PCS
2	5-R050X076R-T	0.5圓形波頭針90度長7.6	NPCS
3	3-5037T	1.5MF 接地片端子 磷銅鍍錫	2PCS
TOLERANCE UNSPECIFIED: X. ±0.50 XX ±0.25 XXX ±0.15 XXXX ±0.05 X" ±2 X" ±1			
DRAWN BY: 陈雄军		DATE: 09.10.6	TITLE: 成品規格圖
CHECKED BY: 何智权		DATE: 09.10.6	PART NAME: 1.5mm Wafer
APPROVED BY: 邱华棠		DATE: 09.10.6	PART NO. 1-5037XXMRT-B
UNIT: mm [inch]		SCALE: 1:1	SIZE: A4
SCALE: 1:1		SIZE: A4	SHEET 1 OF 1