
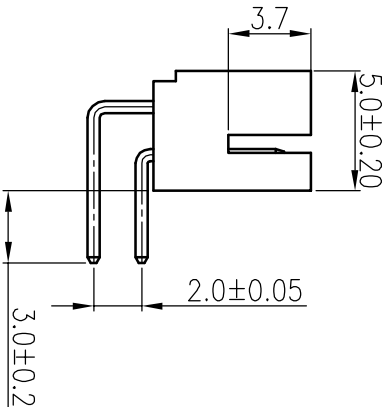
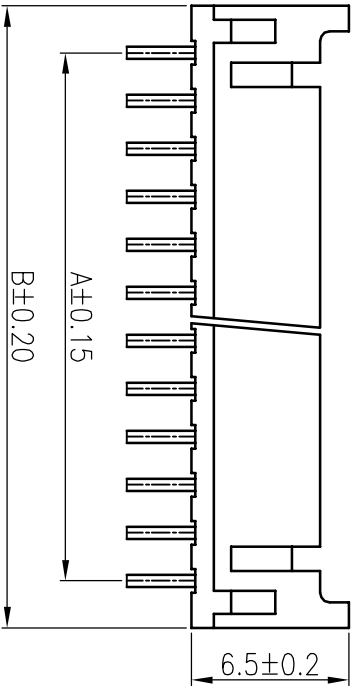


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				11-01-13	


Specification

Rated Voltage: 100V AC/DC
Rated Current: 2A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 800V AC
Operating Temperature: -25℃~+85℃
Plastic Material: PA66+30%GF, UL94V-0,
Contact Material: Brass
Finish: Tin Plated


pin	A	B
2x3	4.00	7.90
2x4	6.00	9.90
2x5	8.00	11.90
2x6	10.00	13.90
2x7	12.00	15.90
2x8	14.00	17.90
2x9	16.00	19.90
2x10	18.00	21.90
2x11	20.00	23.90
2x12	22.00	25.90
2x13	24.00	27.90
2x14	26.00	29.90
2x15	28.00	31.90
2x16	30.00	33.90

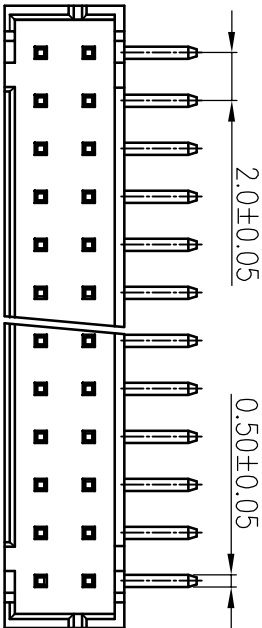

Ordering information

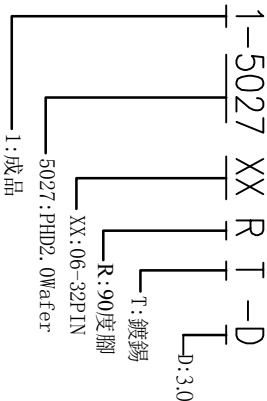

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5027XX	2.0mm塑膠2xNP, 塑膠高6.5(PA66)	1PCS
2	5-Q050x100R-T	0.5四方鍍銅針, 90度長10.0	NPCS
3	5-Q050x140R-T	0.5四方鍍銅針, 90度長14.0	NPCS

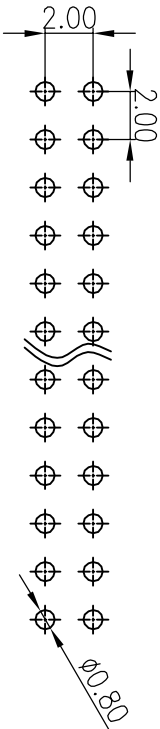

P.C.B LAYOUT

TOLERANCE UNSPECIFIED: X ±0.50 XX ±0.25 XXX ±0.10 XXX ±0.05 X' ±2" XX' ±1"				DRAFTED BY: 陳雄軍 DATE: 11-1-13 TITLE: 成品規格圖 PART NAME: 2.0mm pitch Wafer PART NO. 1-5027XXRT-030 MOLD NO. DRAW NO. A-1-5027XXRT-030 SHEET 1 OF 1			
PROJECTION: X ±0.50 XX ±0.25 XXX ±0.10 XXX ±0.05 X' ±2" XX' ±1"				CHECKED BY: 何智權 DATE: 11-1-13 PART NO. 1-5027XXRT-030 MOLD NO. DRAW NO. A-1-5027XXRT-030 SHEET 1 OF 1			
UNIT: mm [inch] SCALE: 1:1 SIZE: A4				APPROVED BY: 陳宗淵 DATE: 11-1-13 PART NO. 1-5027XXRT-030 MOLD NO. DRAW NO. A-1-5027XXRT-030 SHEET 1 OF 1			