
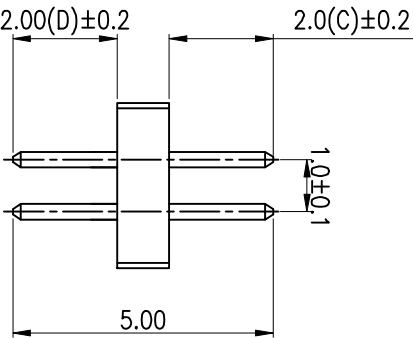
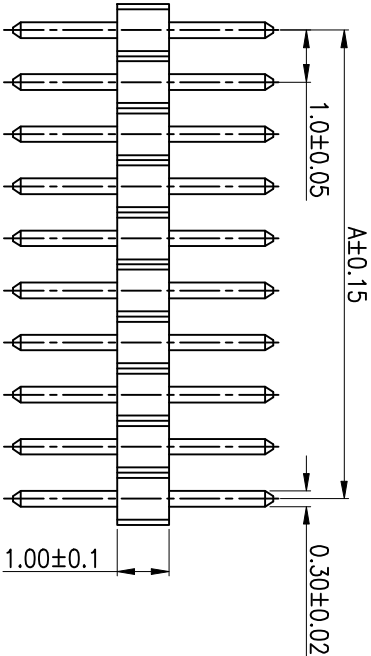



REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			翻版本	07-04-18	

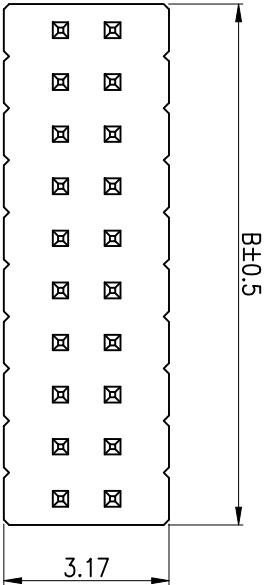


Specification

Rated Voltage: 100V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 800Megohms/Min.
Dielectric Withstanding: 250V AC
Operating Temperature: -40°C~+105°C
Plastic Material: PA6T+30%GF, UL94V-0, Black
Contact Material: Brass
Finish: Gold Flash Plated

Ordering information

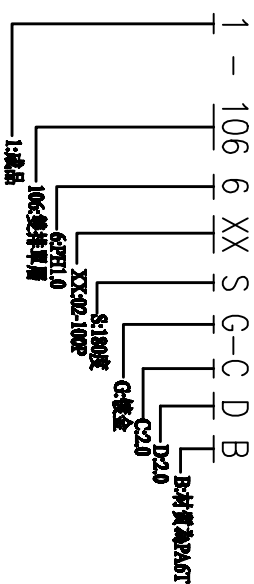

P.C.B LAYOUT

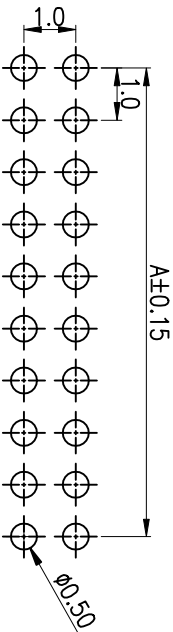

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1026XX-010B	1.0mm间距2X1P, 100°长5.0	1PCS
2	5-0030X050S-G	0.30四方端子, 100°长5.0	NPCS

TOLERANCE UNSPECIFIED:		TITLE: 成品规格图	
X, ±0.50	XX ±0.25	DATE: 14-3-2	PART NO. 1-1066XXSG-020020B
XXX ±0.10	XXX ±0.05	CHECKED BY: 何智权	DRAW NO. 14-3-2
X' ±2	X' ±1	DATE: 14-3-2	WELD NO. 14-3-2
PROJECTION:		APPROVED BY: 陈宗渊	
UNIT: mm [inch]		SCALE: 1:1	
SIZE: A4		SHEET 1 OF 1	

DISAT 东莞得升电子机械有限公司
DISAT MICROELECTRONIC CO., LTD