
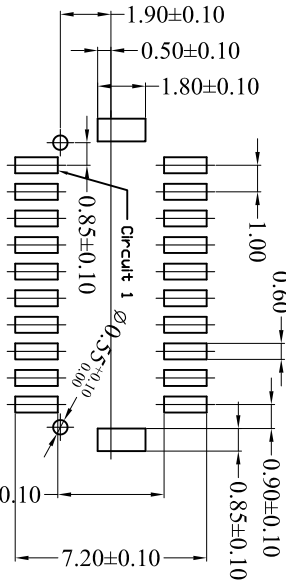
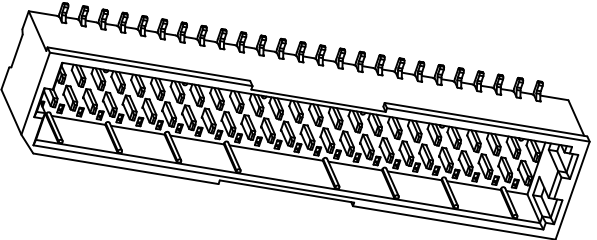
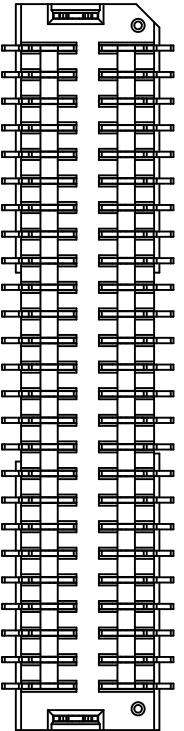
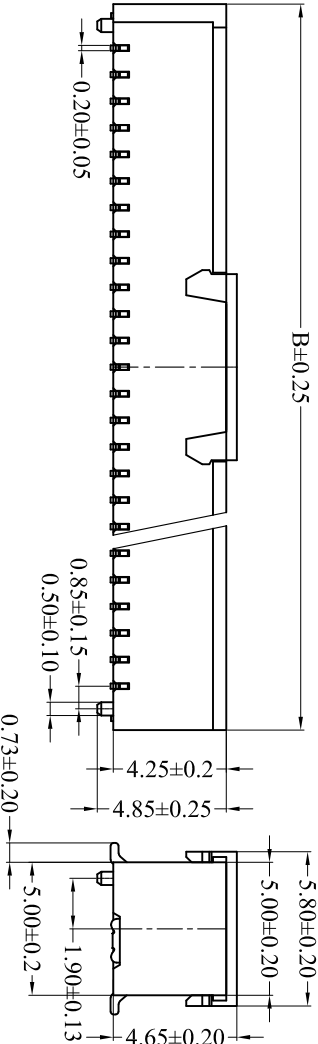



PIN	A	B
2X5	4.0	7.3
2X6	5.0	8.3
2X7	6.0	9.3
2X8	7.0	10.3
2X9	8.0	11.3
2X10	9.0	12.3
2X12	11.0	14.3
2X15	14.0	17.3
2X17	16.0	19.3
2X20	19.0	22.3
2X25	24.0	27.3
2X30	29.0	32.3

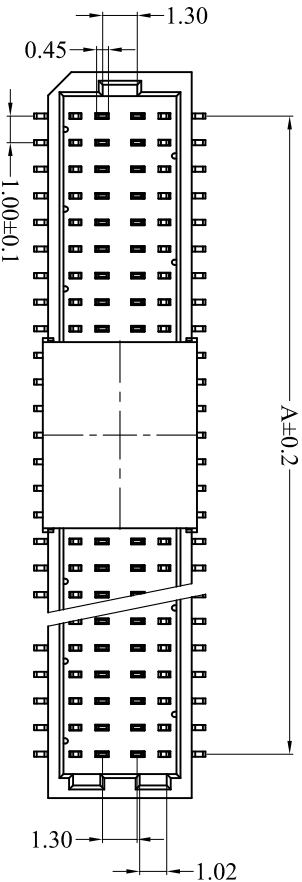


Recommended P.C. Board Layout

REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
B				2022-04-12	

Specification

Rated Voltage: 50V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 100Megohms/Min.
Dielectric Withstanding: 500V AC/minute
Operating Temperature: -25°C~+85°C
Plastic Material: LCP+ γ 30GF, UL94V-0
Contact Material: Phosphor Bronze
Finish: Gold Plated

Ordering information

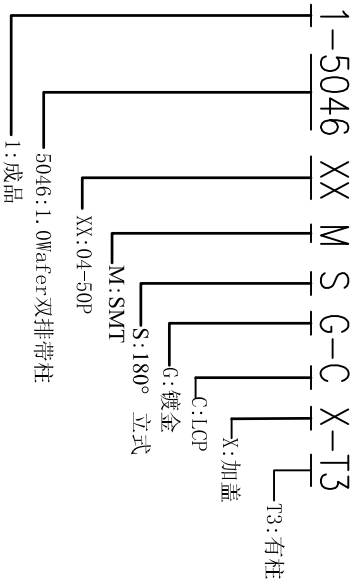

DISNT 得升電子股份有限公司
DISNT ELECTRONIC CO., LTD

TOLERANCE UNSPECIFIED:		DRAWN BY: 阮志龙		DATE: 13-09-05		TITLE: 成品规格圖	
X.	±0.50	CHECKED BY: 何智权		DATE: 13-09-05		PART NO.	1-5046XXMSG-CX-T3
X.X	±0.25	APPROVED BY: 陈宗渊		DATE: 13-09-05		MOLD NO.	
X.XX	±0.15	UNIT: mm [inch]		DATE: 13-09-05		DRAW NO.	A-1-5046XXMSG-CX-T3
X.XXX	±0.05	SCALE: 1:1		DATE: 13-09-05		SHEET	1 OF 1
X.X	±1	SIZE: A4		DATE: 13-09-05			