
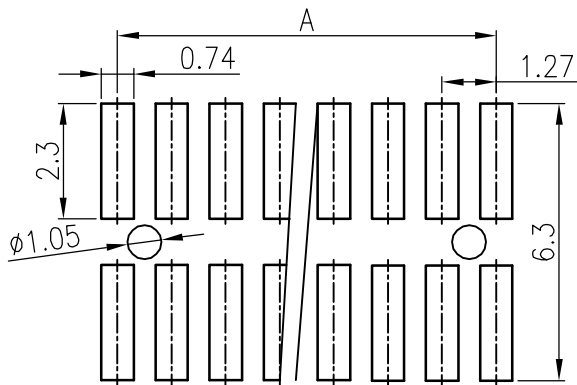
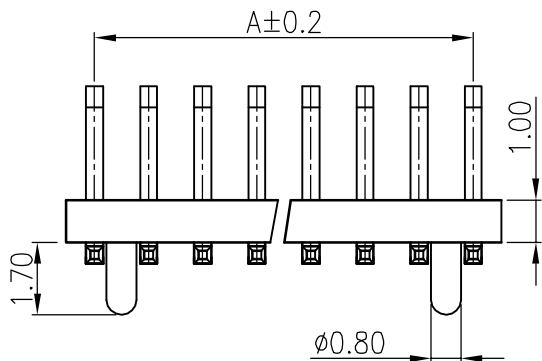


PIN	A	B
2x2	1.27	2.54
2x3	2.54	3.81
2x4	3.81	5.08
2x5	5.08	6.35
2x6	6.35	7.62
2x7	7.62	8.89
2x8	8.89	10.16
2x9	10.16	11.43
2x10	11.43	12.70
2x11	12.70	13.97
2x12	13.97	15.24
2x13	15.24	16.51
2x14	16.51	17.78
2x15	17.78	19.05
2x16	19.05	20.32
2x17	20.32	21.59
2x18	21.59	22.86
2x19	22.86	24.13
2x20	24.13	25.40
2x21	25.40	26.67
2x22	26.67	27.94
2x23	27.94	29.21
2x24	29.21	30.48
2x25	30.48	31.75
2x26	31.75	33.02
2x27	33.02	34.29
2x28	34.29	35.56
2x29	35.56	36.83
2x30	36.83	38.10
2x31	38.10	39.37
2x32	39.37	40.64
2x33	40.64	41.91
2x34	41.91	43.18
2x35	43.18	44.45
2x36	44.45	45.72
2x37	45.72	46.99
2x38	46.99	48.26
2x39	48.26	49.53
2x40	49.53	50.80
2x41	50.80	52.07
2x42	52.07	53.34
2x43	53.34	54.61
2x44	54.61	55.88
2x45	55.88	57.15
2x46	57.15	58.42
2x47	58.42	59.69
2x48	59.69	60.96
2x49	60.96	62.23
2x50	62.23	63.50

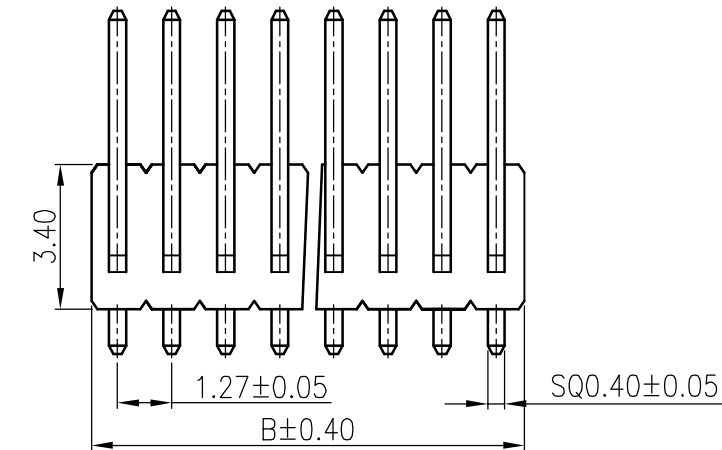

PCB Layout

REV.	ECN NO.	LOCTIONS.	DESCRIPTION	DATE	CHANGER
A				08-05-17	

Specification

Rated Voltage:	100V AC/DC
Rated Current:	1A AC/DC
Contact Resistance:	20mohms max
Insulator Resistance:	1000Megohms/Min.
Dielectric Withstanding:	500V AC
Operating Temperature:	-40°C~+105°C
Plastic Material:	PA6T+30%GF,UL94V-0,Black
Contact Material:	Brass
Finish:	Gold Flash Plated

Ordering information

1	-	115	5	XX	M	R	G	-	C	D	B
B:材質為PA6T											
D:5.5											
C:3.6											
G:鍍金											
R:90°											
M:SMT											
XX:04-100P											
5:PH1.27											
115:雙排帶柱											
1:成品											

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1155XX-010B	1.27帶柱塑膠2xNP,塑膠高1.0(PA6T),孔徑0.40	1PCS
2	5-Q040x090R-G	0.40四方鍍金針,90°長9.0	NPCS
3	5-Q040x115R-G	0.40四方鍍金針,90°長11.5	NPCS

TOLERANCE UNSPECIFIED: X. ±0.50 X.X ±0.25 X.XX ±0.10 X.XXX ±0.05 X." ±2" X.X" ±1"		DISNT 東莞得升機械電子有限公司 DISNT MECHANICAL ELECTRONIC CO.,LTD	
DRAWN BY : 阮志龙	DATE : 2015-05-05	TITLE: 成品規格圖	
		PART NAME: 1.27mm Pin Header	
PROJECTION: 	CHECKED BY: 阮志龙	DATE : 2015-05-05	PART NO. 1-1155XXMRG-036055B
		MOLD NO.	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱台安	DATE : 2015-05-05	DRAW NO. A-1-1155XXMRG-036055B
		SHEET	1 OF 1