


PIN	A	B
2x2	1.00	2.00
2x3	2.00	3.00
2x4	3.00	4.00
2x5	4.00	5.00
2x6	5.00	6.00
2x7	6.00	7.00
2x8	7.00	8.00
2x9	8.00	9.00
2x10	9.00	10.00
2x11	10.00	11.00
2x12	11.00	12.00
2x13	12.00	13.00
2x14	13.00	14.00
2x15	14.00	15.00
2x16	15.00	16.00
2x17	16.00	17.00
2x18	17.00	18.00
2x19	18.00	19.00
2x20	19.00	20.00
2x21	20.00	21.00
2x22	21.00	22.00
2x23	22.00	23.00
2x24	23.00	24.00
2x25	24.00	25.00
2x26	25.00	26.00
2x27	26.00	27.00
2x28	27.00	28.00
2x29	28.00	29.00
2x30	29.00	30.00
2x31	30.00	31.00
2x32	31.00	32.00
2x33	32.00	33.00
2x34	33.00	34.00
2x35	34.00	35.00
2x36	35.00	36.00
2x37	36.00	37.00
2x38	37.00	38.00
2x39	38.00	39.00
2x40	39.00	40.00
2x41	40.00	41.00
2x42	41.00	42.00
2x43	42.00	43.00
2x44	43.00	44.00
2x45	44.00	45.00
2x46	45.00	46.00
2x47	46.00	47.00
2x48	47.00	48.00
2x49	48.00	49.00
2x50	49.00	50.00

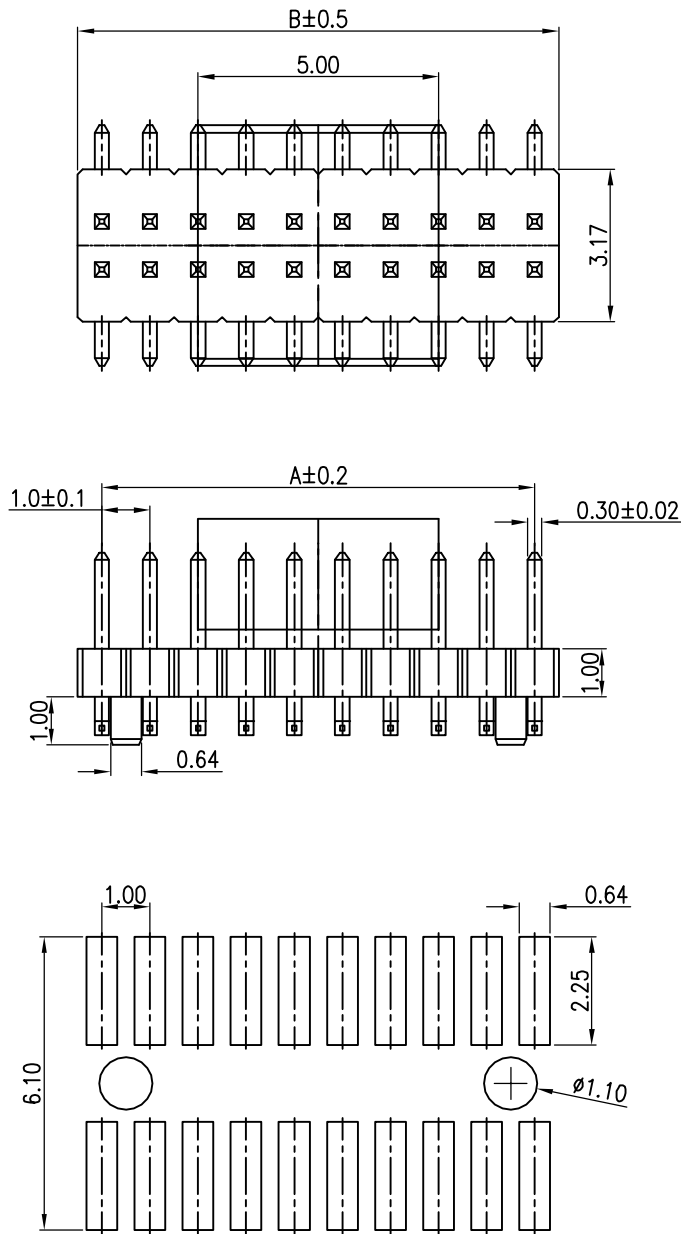

REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			新版本	07'-10-12	

Specification

Rated Voltage:	100V AC/DC
Rated Current:	1A AC/DC
Contact Resistance:	20mohms max
Insulator Resistance:	800Megohms/Min.
Dielectric Withstanding:	250V AC
Operating Temperature:	-40°C~+105°C
Plastic Material:	PA6T+30%GF,UL94V-0,Black
Contact Material:	Brass
Finish:	Gold Flash Plated

Ordering information

1	-	115	6	XX	M	G-C	D	B	X
									X:加蓋
									B:材質為PA6T
									D:5.0
									C:2.0
									G:鍍金
									M:SMT
									XX:02-100P
									6:PH1.0
									115:雙排單層帶柱
									1:成品

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1156XX-010B	1.0mm帶柱塑膠2xNP,塑膠高1.0(PA6T)	1PCS
2	5-Q030x054R-G	0.30四方鍍金針,90°長5.4	NPXS

TOLERANCE UNSPECIFIED: X. ±0.50 X.X ±0.25 X.XX ±0.10 X.XXX ±0.05 X.* ±2° X.* ±1°				DISNT 東莞得升電子機械有限公司 DISNT MECHANICAL ELECTRONIC CO.,LTD			
DRAWN BY : 阮志龙		DATE : 2016-01-15		TITLE: 成品規格圖		PART NAME: 1.0mm Pin Header	
PROJECTION: 		CHECKED BY: 阮志龙		DATE : 2016-01-15		PART NO. 1-1156XXMG-020050BX	
UNIT: mm [inch]		APPROVED BY: 邱台安		DATE : 2016-01-15		DRAW NO. A-1-1156XXMG-020050BX	
SCALE:1:1		SIZE: A4		SHEET		1 OF 1	