
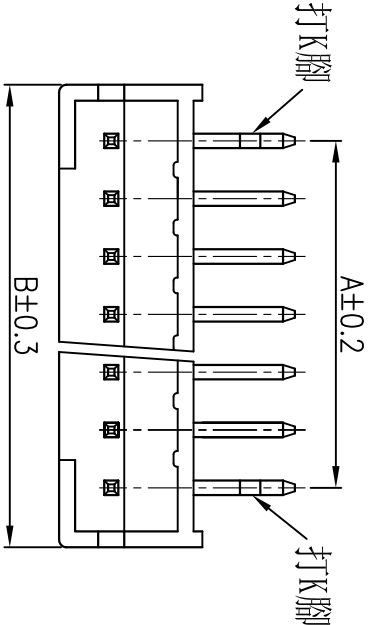




REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				09-4-27	

Specification

Rated Voltage: 125V AC/DC
Rated Current: 2A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 800V AC
Operating Temperature: -25°C~+85°C
Plastic Material: PA66,UL94V-2,
Contact Material: Brass
Finish: Tin Plated


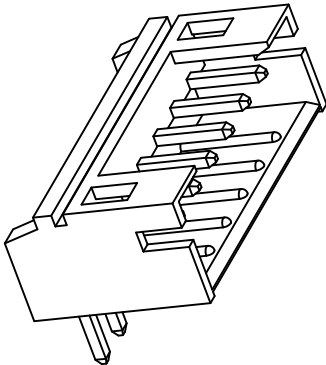


pin	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

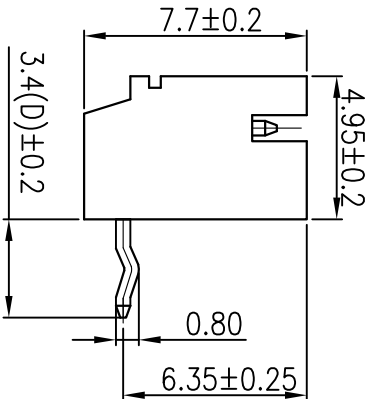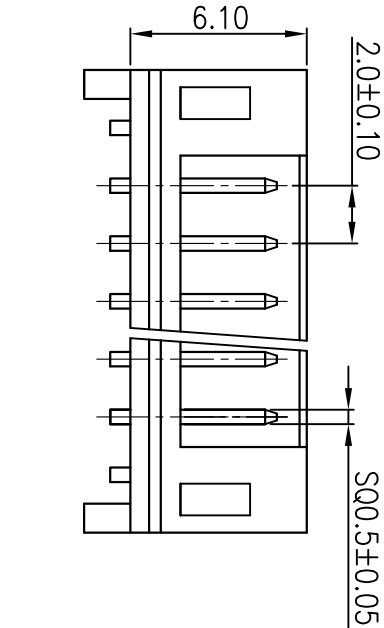

Ordering information

1-5013 XX R T-D-K A-T2

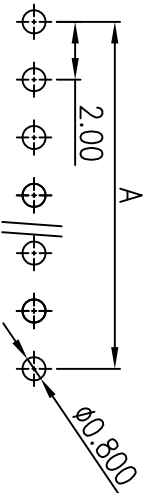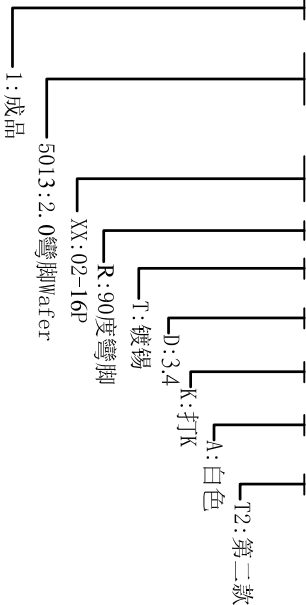

P. C. B LAYOUT

TOLERANCE UNSPECIFIED:		DISMT 得升電子股份有限公司 DISMT MECHANICAL ELECTRONIC CO.,LTD	
X	±0.50	DRAWN BY: 陈雄军	TITLE: 成品规格图
X.X	±0.25	DATE: 10-7-19	PART NAME: 2.0mm Wafer
XXX	±0.15	CHECKED BY: 何智权	PART NO. 1-5013XXRT-034-KA-T2
XXX	±0.05	DATE: 10-7-19	MOLD NO.
X.X	±2°	APPROVED BY: 陈宗渊	DRAW NO. A-1-5013XXRT-034-KA-T2
PROJECTION:		SCALE:1:1	SHEET 1 OF 1
UNIT: mm [inch]	SIZE: A4		