


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			新版本	07-10-12	

Specification

Rated Voltage: 100V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 800Megohms/Min.
Dielectric Withstanding: 250V AC
Operating Temperature: -40°C~+105°C
Plastic Material: PA6T+30%GF, UL94V-0, Black
Contact Material: Brass
Finish: Gold Flash Plated

Ordering information

1-118 6 XX M G-C D B X
1:成品
118:雙排三層帶柱
6PH10
XX-02-100P
M.SMT
G:鍍金
C:1.9
D:5.0
B:材質為PA6T
X:CAP

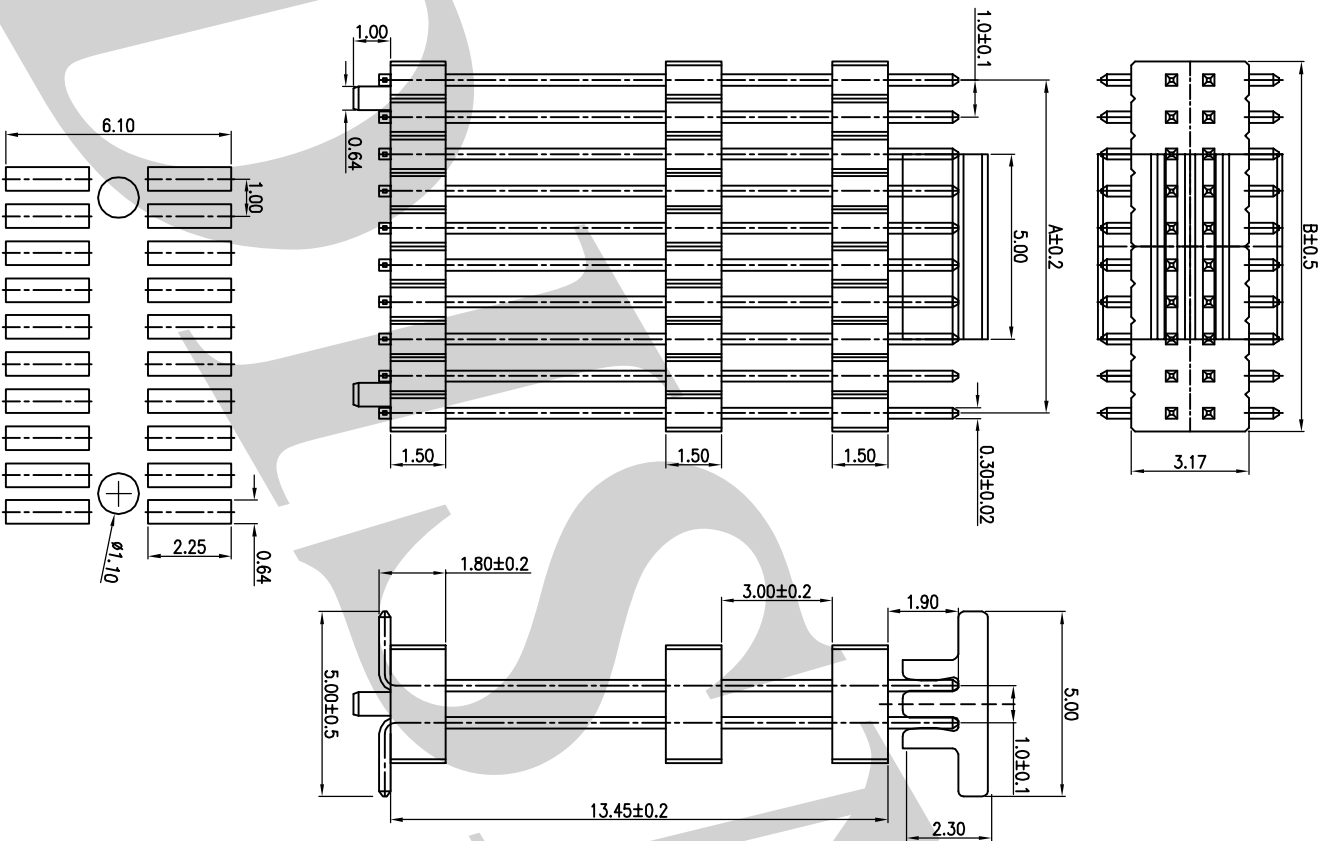

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1156XX-015B	1.0mm帶柱塑膠2XNP,塑膠高1.5(PA6T)	1PCS
2	5-0030X172R-G	0.30四方鍍金針,90°長17.20	NPCS

DISNT 得升電子有限公司
DISNT ELECTRONIC CO., LTD

DRAWN BY: 阮志龍
DATE: 2015-11-17
PART NAME: 1.0mm Pin Header
PART NO.: 1-1186XXMG-019050BX
MOLD NO.:
TITLE: 成品規格圖

CHECKED BY: 阮志龍
DATE: 2015-11-17
APPROVED BY: 邱台安
DATE: 2015-11-17
DRAW NO.: A-1-1186XXMG-019050BX
SHEET 1 OF 1

UNIT: mm [inch]	SCALE: 1:1	SIZE: A4
-----------------	------------	----------