


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER
A			7/A011-XX129LX-D	07'-02-12	
B	ECN06123101		新版本	07'-03-26	
C			2.5(D) ±0.2 改为 2.1(D) ±0.2	09-07-16	陈肇军

Specification

Rated Voltage: 350V AC/DC
Rated Current: 7A AC/DC
Contact Resistance: 30mohms max
Insulator Resistance: 1500Megohms/Min.
Dielectric Withstanding: 1000V AC
Operating Temperature: -25℃~+85℃
Plastic Material: PA66+30%GF, UL94V-2, White
Contact Material: Brass
Finish: TIN Plated




Ordering information

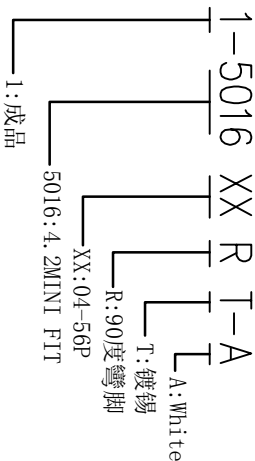

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5016XX-A	4.2mm White 塑膠 2xNP, 材質 PA66, 白色	1PCS
2	5-Q114x155R-T	1.14四方鐵錐針, 90度長15.5	NPCS
3	5-Q114x251R-T	1.14四方鐵錐針, 90度長25.1	NPCS

東莞得升電子機械有限公司
DISNT MECHANICAL ELECTRONIC CO.,LTD

TOLERANCE UNSPECIFIED:		TITLE: 成品規格圖	
X	±0.50	DRAWN BY: 杨熊	PART NO. 1-5016XXRT-A
XX	±0.25	CHECKED BY: 何智权	MOLD NO.
XXX	±0.15	DATE: 7-16-09	PART NAME: 4.2mm MINI FIT
XXXX	±0.05	DATE: 7-16-09	DRAW NO. A-1-5016XXRT-A
X*	±2	DATE: 7-16-09	SHEET 1 OF 1
XX	±1	DATE: 7-16-09	
PROJECTION:		APPROVED BY: 陈尔渊	
		SCALE: 1:1	
UNIT: mm [inch]		SIZE: A4	

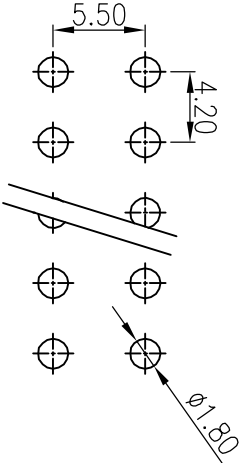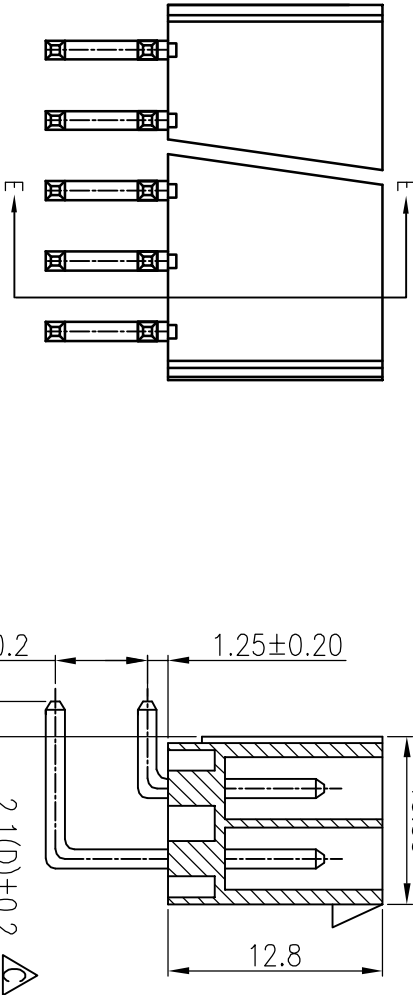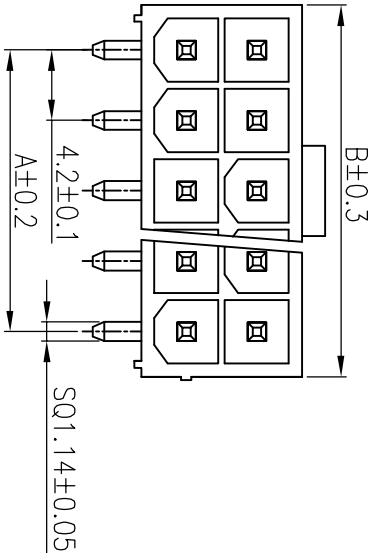

pin /row	A	B
2x2	4.20	10.00
2x3	8.40	14.20
2x4	12.60	18.40
2x5	16.80	22.60
2x6	21.00	26.80
2x7	25.20	31.00
2x8	29.40	35.20
2x9	33.60	39.40
2x10	37.80	43.60
2x11	42.00	47.80
2x12	46.20	52.00
2x13	50.40	56.20
2x14	54.60	60.40
2x15	58.80	64.60
2x16	63.00	68.80
2x17	67.20	73.00
2x18	71.40	77.20
2x19	75.60	81.40
2x20	79.80	85.60
2x21	84.00	89.80
2x22	88.20	94.00
2x23	92.40	98.20
2x24	96.60	102.40
2x25	100.80	106.60
2x26	105.00	110.80
2x27	109.20	115.00
2x28	113.40	119.20