
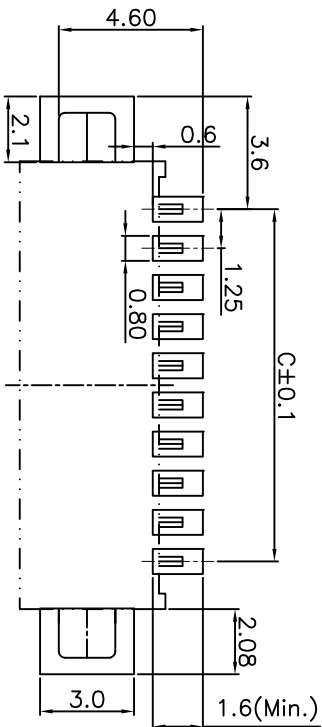
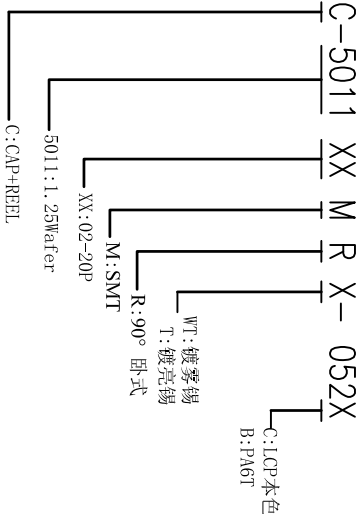

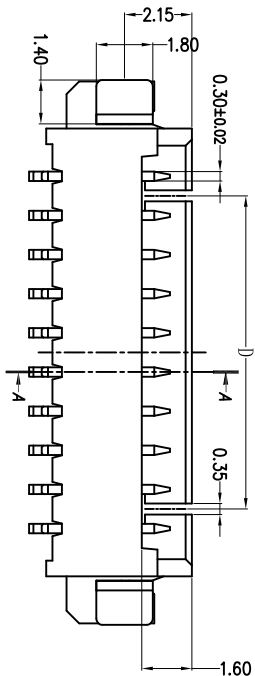


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-09-15	

Specification

Rated Voltage: 50V AC/DC
Rated Current: 1A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 100Megohms/Min.
Dielectric Withstanding: 500V AC/minute
Operating Temperature: -25°C~+85°C
Plastic Material: LCP,UL94V-0
Contact Material: Phosphor Bronze
Finish: TIN Plated

TABLE of DIMENSION				
Pin 數	A $\pm$ 0.15	B $\pm$ 0.1	C $\pm$ 0.05	D $\pm$ 0.1
02	7.40	3.20	1.25	0
03	8.65	4.45	2.50	0
04	9.90	5.70	3.75	2.50
05	11.15	6.95	5.00	3.75
06	12.40	8.20	6.25	5.00
07	13.65	9.45	7.50	6.25
08	14.90	10.70	8.75	7.50
09	16.15	11.95	10.00	8.75
10	17.40	13.20	11.25	10.00
11	18.65	14.45	12.50	11.25
12	19.90	15.70	13.75	12.50
13	21.15	16.95	15.00	13.75
14	22.40	18.20	16.25	15.00
15	23.65	19.45	17.50	16.25
16	24.90	20.70	18.75	17.50
17	26.15	21.95	20.00	18.75
18	27.40	23.20	21.25	20.00
19	28.65	24.45	22.50	21.25
20	29.90	25.70	23.75	22.50

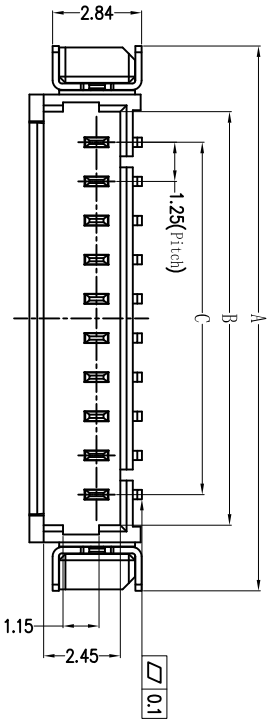

RECOMMENDED PCB LAYOUT

TOLERANCE UNSPECIFIED: X. $\pm$ 0.50 XX $\pm$ 0.25 XXX $\pm$ 0.15 XXXX $\pm$ 0.05 X' $\pm$ 2" X'X' $\pm$ 1"		DISNT 得升電子股份有限公司 DISVT ELECTRONIC CO.,LTD	
PROJECTION: 	CHECKED BY: 何立永	DATE: 2019-04-03	TITLE: 成品規格圖
UNIT: mm [inch]	DRAWN BY: 邱台安	DATE: 2019-04-03	PART NO. DSC-5011XXMRX-052X
SCALE:1:1	APPROVED BY: 邱台安	DATE: 2019-04-03	MOLD NO.
			DRAW NO. 1-WF098
			SHEET 1 OF 1