
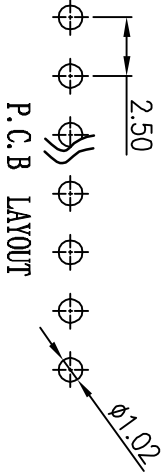
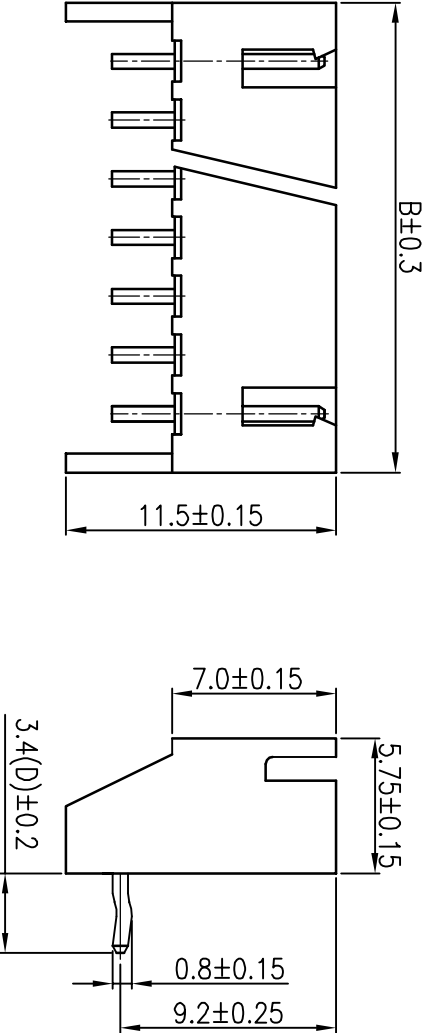



REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				12-8-14	

Specification

Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 10mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 800V AC
Operating Temperature: -25°C~+85°C
Plastic Material: PA66,UL94-V0,
Contact Material: Brass
Finish: TIN Plated

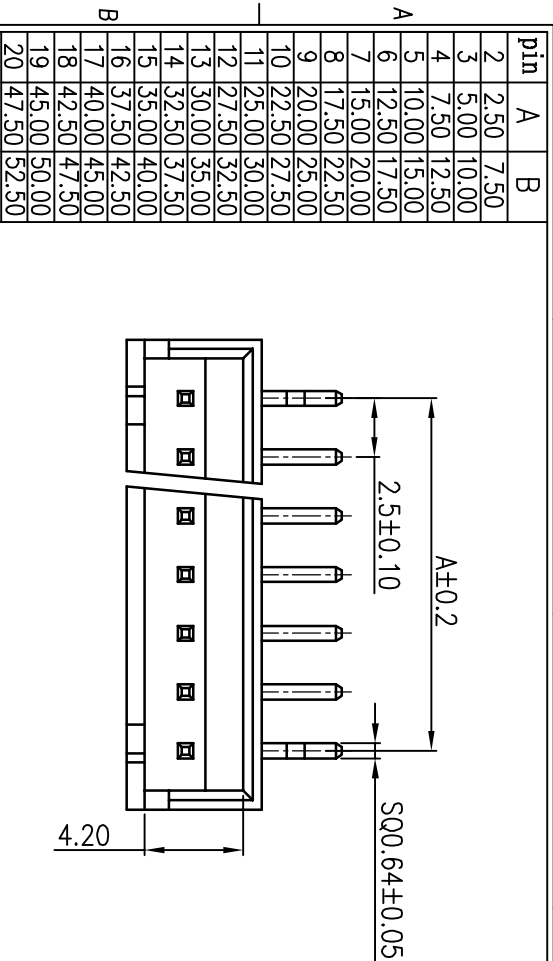

Ordering information

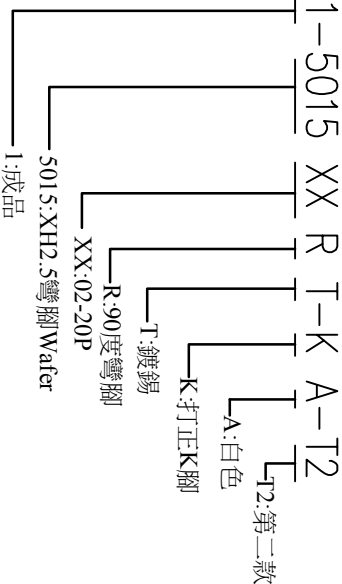

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-5015XX-A	2.5mm塑膠1x1NP 翅膠高11.5(PA66)	1PCS
2	5-Q064x150R-T	0.64四方撻錫針,90度長15.0	NPcs

TOLERANCE UNSPECIFIED:		DRAWN BY: 陳雄軍		DATE: 8-14-12		TITLE: 成品規格圖	
X	±0.50	CHECKED BY: 何智权		DATE: 8-14-12		PART NO. 1-5015XXRT-KA-T2	
X.X	±0.25	APPROVED BY: 陈宗渊		DATE: 8-14-12		MOLD NO.	
X.XX	±0.15	SCALE:1:1		SIZE: A4		DRAW NO. A-1-5015XXRT-KA-T2	
X.XXX	±0.05	PROJECTION:		SHEET 1 OF 1			
X"	±2"						
X.X	±1"						