PIN	A	B
10	5.00	12.50
14	7.50	15.00
20	11.25	18.75
30	17.50	25.00
40	23.75	31.25

REV.	ECN NO.	LOCTIONS.	DESCRIPTION	DATE	CHANGER
A				08-10-20	

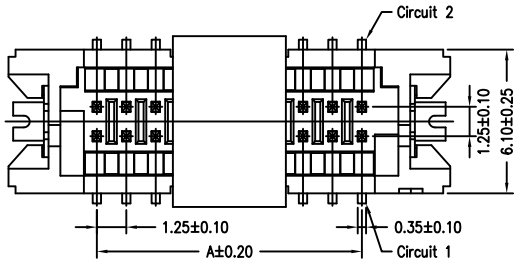

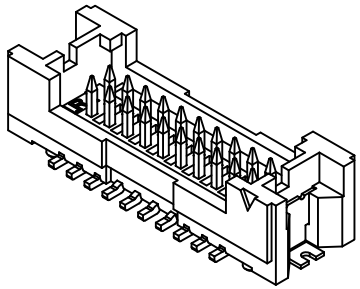

Specification

Rated Voltage:	250V AC/DC
Rated Current:	3A AC/DC
Contact Resistance:	20mohms max
Insulator Resistance:	5000Megohms/Min.
Dielectric Withstanding:	500V AC
Operating Temperature:	−40℃~+105℃
Plastic Material:	PA6T+30%GF,UL94V-0
Contact Material:	Brass
Finish:	Gold flash Plated

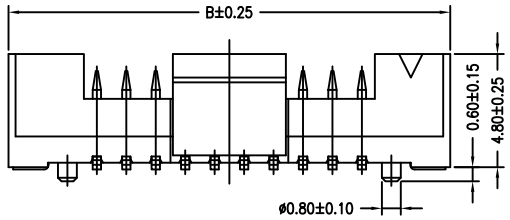



Ordering information

1-5021 XX M S G-B

- 1: 成品
- 5011: 1.25Wafer雙排
- XX: 10-40P
- M: SMT
- S: 180度
- G: 鍍金
- B: PA6T

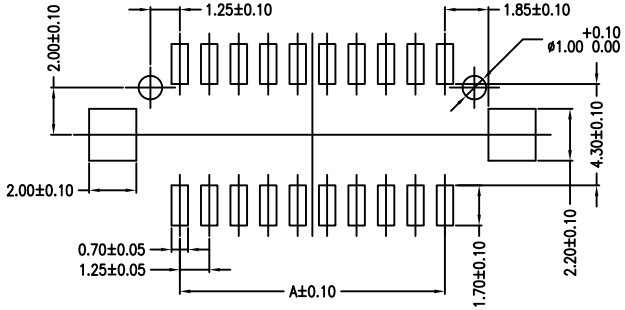

P.C.B LAYOUT

TOLERANCE UNSPECIFIED:
X. ±0.50
X.X ±0.25
X.XX ±0.10
X.XXX ±0.05
X.° ±2°
X.X° ±1°

PROJECTION:

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DISNT 得升電子股份有限公司
DISNT MECHANICAL ELECTRONIC CO.,LTD

DRAWED BY :	DATE :	TITLE:	成品規格圖
		PART NAME:	1.25mm Wafer
CHECKED BY:	DATE :	PART NO.	1-5021XXMSG-B
		MOLD NO.	
APPROVED BY:	DATE :	DRAW NO.	A-1-5021XXMSG-B
		SHEET	1 OF 1