


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A				08-12-03	

Specification





Rated Voltage: 100V AC/DC
Rated Current: 2A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 1000Megohms/Min.
Dielectric Withstanding: 800V AC
Operating Temperature: -25°C~+85°C
Plastic Material: PA6T+30%GF,UL94V-0,
Contact Material: Brass
Finish: Tin Plated

Ordering information

1-5012 XX M S WT- B

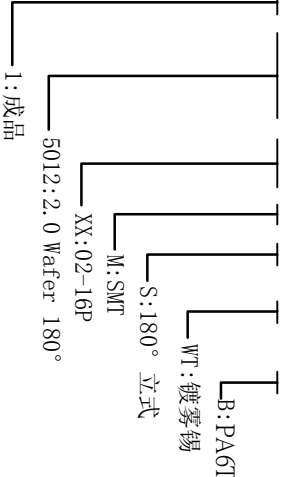

pin	A	B
2	2.0	8.0
3	4.0	10.0
4	6.0	12.0
5	8.0	14.0
6	10.0	16.0
7	12.0	18.0
8	14.0	20.0
9	16.0	22.0
10	18.0	24.0
11	20.0	26.0
12	22.0	28.0
13	24.0	30.0
14	26.0	32.0
15	28.0	34.0
16	30.0	36.0

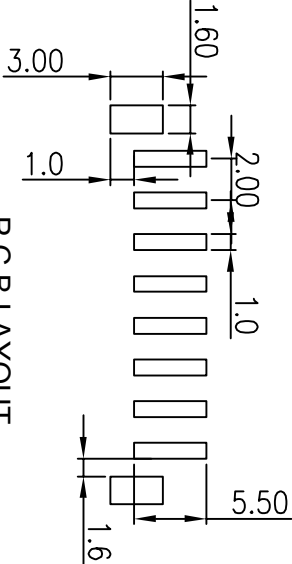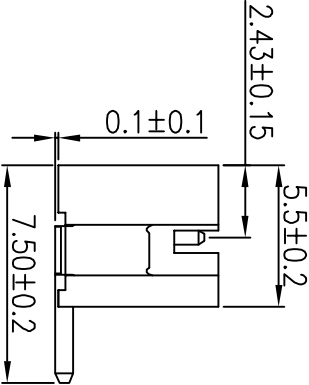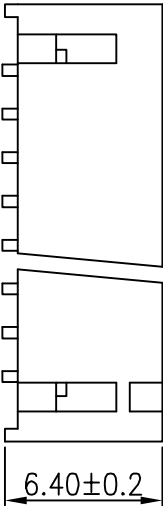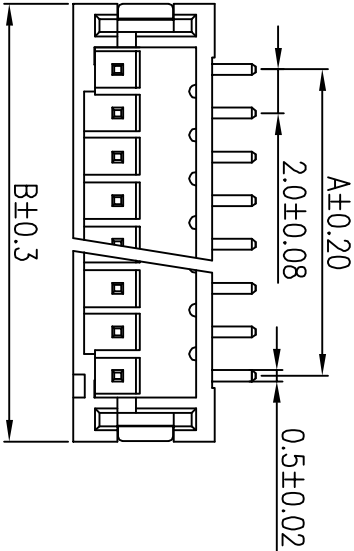

P.C.B LAYOUT

TOLERANCE UNSPECIFIED:			
X	±0.50		
XX	±0.25		
XXX	±0.15		
XXXX	±0.05		
X"	±2°		
XX	±1°		
PROJECTION:			
UNIT:	mm [inch]	APPROVED BY:	DATE :
SCALE:1:1	SIZE: A4	陈宗渊	12-03-08
DRAWN BY :			
何智权			
CHECKED BY:			
陈雄军			
DATE :			
12-03-08			
TITLE:			
成品规格图			
PART NAME:			
2.0mm Wafer			
PART NO.			
1-5012XXMSWT-B			
MOLD NO.			
DRAW NO.			
A-1-5012XXMSWT-B			
SHEET			
1 OF 1			

DISMT 東莞得升電子機械有限公司
DISMT MECHANICAL ELECTRONIC CO.,LTD