
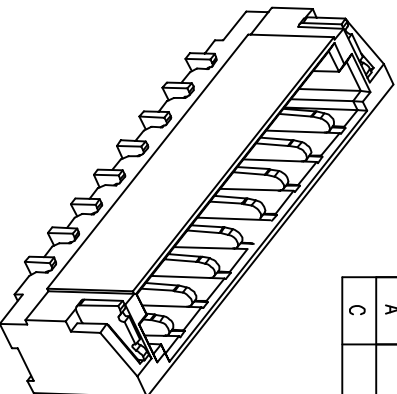


pin	A	B	C
3	1.60	4.60	2.7
4	2.40	5.40	3.5
5	3.20	6.20	4.3
6	4.00	7.00	5.1
7	4.80	7.80	5.9
8	5.60	8.60	6.7
9	6.40	9.40	7.5
10	7.20	10.20	8.3
15	12.00	15.00	12.3


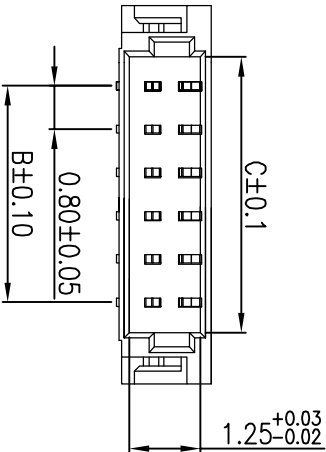


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER
A				09-2-11	
C			增加立体图	10-1-28	

Specification

Rated Voltage: 30V AC/DC
Rated Current: 0.5A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 100Megohms/Min.
Dielectric Withstanding: 200V AC
Operating Temperature: -25°C~+85°C
Plastic Material: LCP, UL94V-0, Black(纯黑胶)
Contact Material: Phosphor Bronze
Finish: Gold Flash Plated

Ordering information

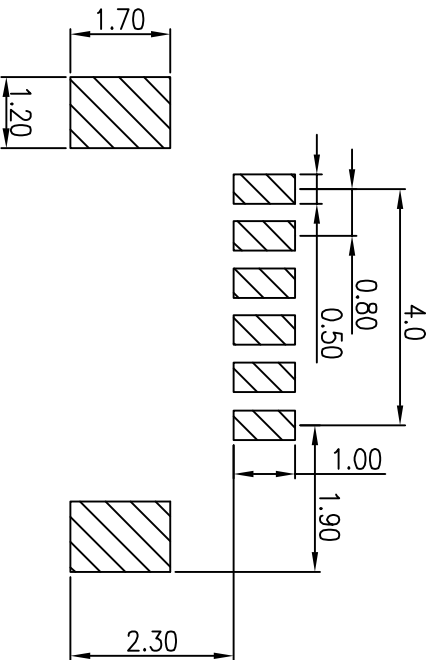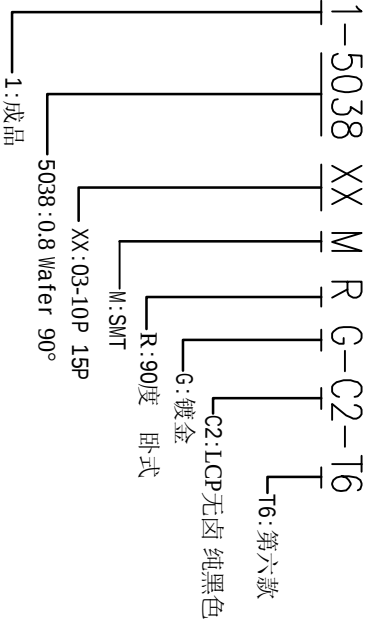

P.C.B LAYOUT

TOLERANCE UNSPECIFIED:		DISMT 東莞得升電子機械有限公司	
X: ±0.50		DISMT MECHANICAL ELECTRONIC CO.,LTD	
XX: ±0.25		DRAWN BY: 陈雄军	
XXX: ±0.15		DATE: 10-8-13	
X.XX: ±0.05		TITLE: 成品规格图	
X.X: ±2°		PART NAME: 0.8mm Wafer SMT (镀金) 纯黑色	
X.X: ±1°		PART NO. 1-5038XXMRG-C2-T6	
PROJECTION:		CHECKED BY: 何智权	
UNIT: mm [inch]		DATE: 10-8-13	
SCALE:1:1		APPROVED BY: 陈宗渊	
SIZE: A4		DATE: 10-8-13	
		DRAW NO. A-1-5038XXMRG-C2-T6	
		SHEET 1 OF 1	