
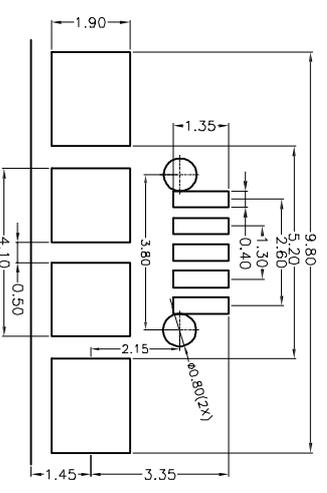
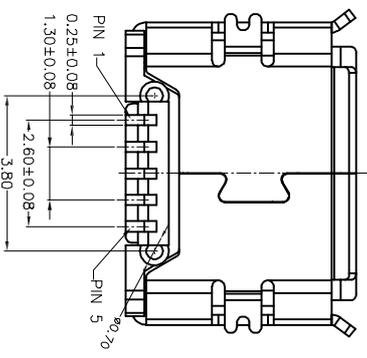
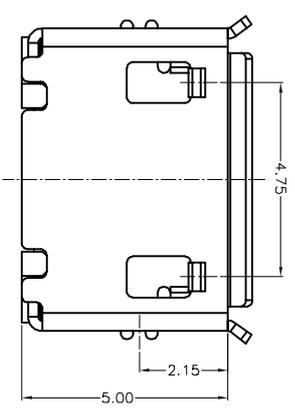
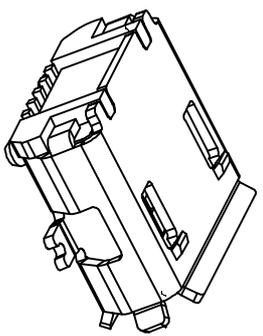
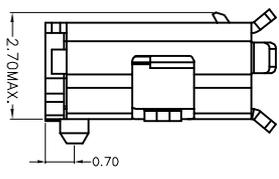



REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	CHANGER
A				06-03-13	

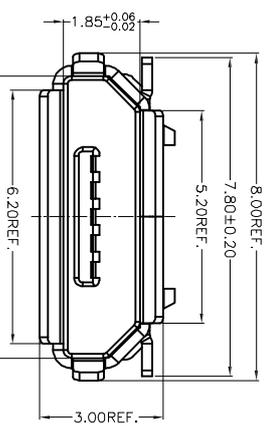

- MATERIALS**
- 1 PLASTIC HI-TEMP PLASTIC (UL 94V-0), BLACK
  - 2 TERMINAL COPPER ALLOY, GOLD PLATED OVER NICKEL
  - 3 SHELL STAINLESS STEEL NICKEL PLATED OVERALL SPECIFICATION
  - 1 MATING FORCE 35N MAX
  - 2 UNMATING FORCE 10N MIN, INITIAL
  - 8 - 20N AFTER 10000 CYCLES
  - 3 DURABILITY 10000 CYCLES MIN
  - 4 CURRENT 1.0A
  - 5 VOLTAGE 30V MAX
  - 6 WITHSTANDING VOLTAGE 100V AC
  - 7 CONTACT RESISTANCE 30mΩ MAX INITIAL, 40mΩ MAX AFTER 10000 CYCLES
  - 8 INSULATION RESISTANCE 100MΩ MIN
  - 9 OPERATING TEMPERATURE RANGE -30 C TO +80 C

## Ordering information

T-D M U X H O 2 T P-XX

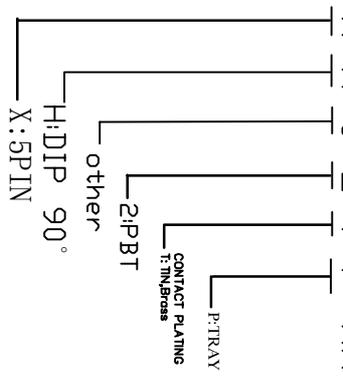

TOLERANCE UNSPECIFIED: X ±0.50 XX ±0.25 XXX ±0.15 X.XXX ±0.05 X.X ±0.1 X.X" ±0.05		PROJECTION: 		CHECKED BY: 何智权 DATE: 6-3-13	
UNITS: mm [inch] SCALE: 1:1		DRAWN BY: 杨熊 DATE: 6-3-13		APPROVED BY: 陈宗渊 DATE: 6-3-13	
DISNT 得升電子股份有限公司 DISNT MECHANICAL ELECTRONIC CO., LTD		TITLE: 成品規格圖 PART NAME: MICRO USB 5PIN B TYPE SMT		PART NO.: T-DMUXHO2TP-00 MOLD NO.:	
		DRAW NO.: T-DMUXHO2TP-00 SHEET: 1 OF 1			