


REV.	ECN NO.	LOCATIONS.	DESCRIPTION	DATE	CHANGER
A			舊料號:G71099-XX254LX-C/D	05-12-20	
B	ECN06123101	△	新版本	06-11-14	

Specification

Rated Voltage: 250V AC/DC
Rated Current: 3A AC/DC
Contact Resistance: 20mohms max
Insulator Resistance: 5000Megohms/Min.
Dielectric Withstanding: 1000V AC
Operating Temperature: -40°C~+105°C
Plastic Material: PA6T+30%GF, UL94V-0,Block
Contact Material: Brass
Finish: Cold Flash Plated




Ordering information

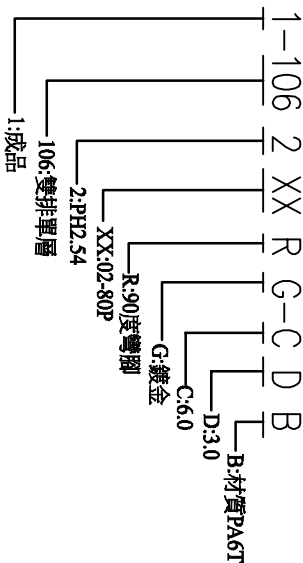

ITEM	PART NO	SPECIFICATION	Q'TY
1	2-1022XX-0254B	2.54mm 塑膠2XND, 塑膠高2.54(PA6T)	1PCS
2	5-0064x140R-G	0.64四方鍍金針,90度長14.0	NPCS
3	5-0064x190R-G	0.64四方鍍金針,90度長19.0	NPCS

DISNT 東莞得牙電子機械有限公司
DISNT MECHANICAL ELECTRONIC CO.,LTD

TOLERANCE UNSPECIFIED: X XX ±0.50 XX XX ±0.25 XX XX ±0.10 X.XXX ±0.05 X' ±2" XX' ±1"		DRAWN BY: 楊熊 DATE: 6-11-14 CHECKED BY: 何智权 DATE: 6-11-14 PROJECTION: UNIT: mm [inch] SCALE:1:1 SIZE: A4		APPROVED BY: 陈宗渊 DATE: 6-11-14 SHEET 1 OF 1	
TITLE: 成品規格圖		PART NO. 1-1062XXRG-060030B		MOLD NO.	
PART NAME: 2.54mm Pin Header		DRAW NO. A-1-1062XXRG-060030B		SHEET	

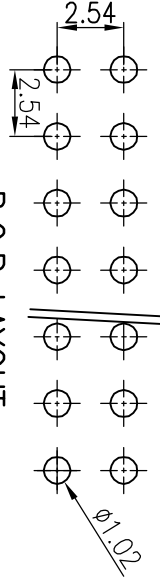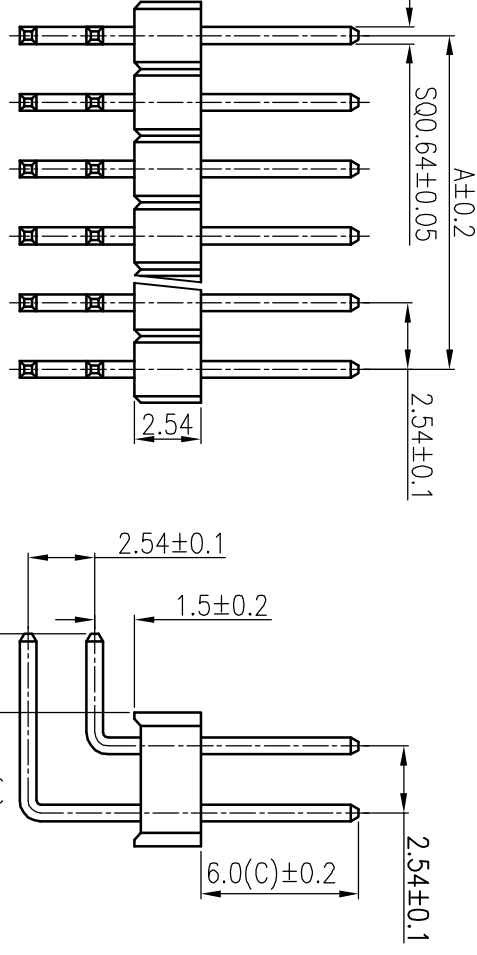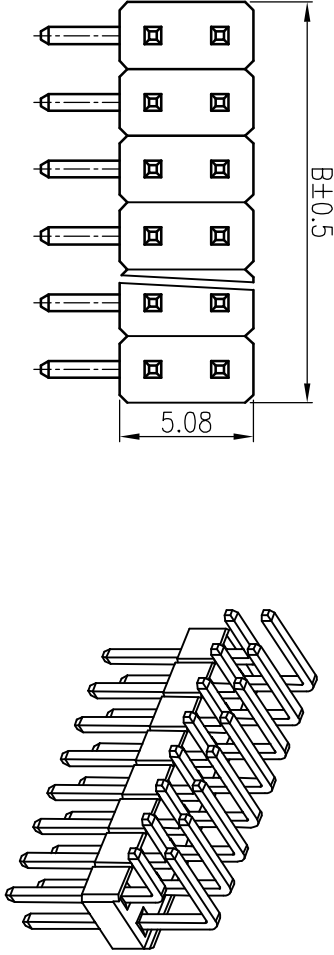

P.C.B LAYOUT