
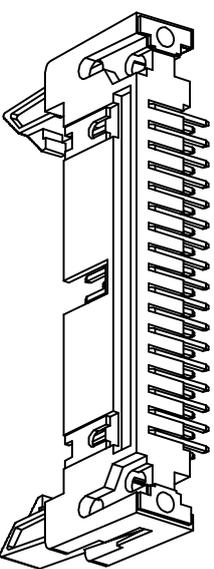
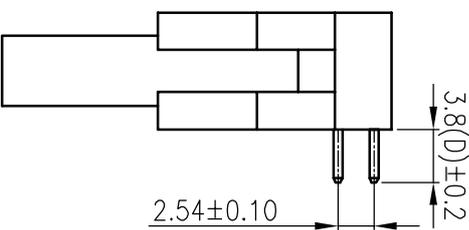


pin /ROW	A	B
2x05	10.16	32.00
2x06	12.70	34.54
2x07	15.24	37.08
2x08	17.78	39.62
2x10	22.86	44.70
2x12	27.94	49.78
2x13	30.48	52.32
2x15	35.56	57.40
2x17	40.64	62.48
2x20	48.26	70.10
2x25	60.96	82.80
2x30	73.66	95.50
2x32	78.74	100.58

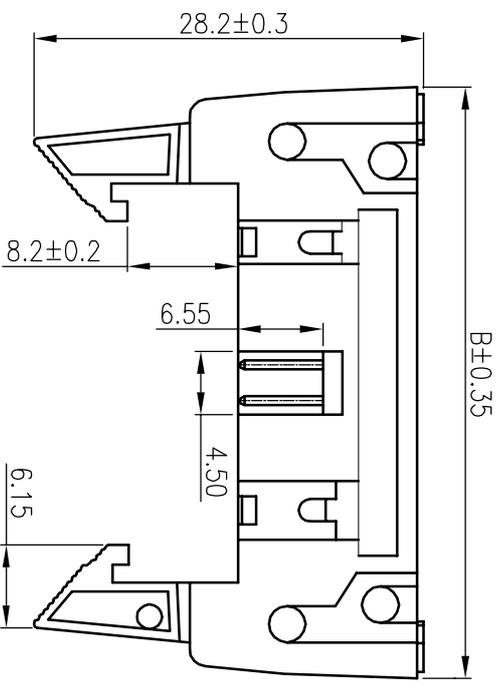


Specification


- Rated Voltage: 250V AC/DC
- Rated Current: 3A AC/DC
- Contact Resistance: 20mohms max
- Insulator Resistance: 5000Megohms/Min.
- Dielectric Withstanding: 1000V AC
- Operating Temperature: -40C~+105C
- Plastic Material: PBT+30%GF, UL94V-0 Black
- Contact Material: Brass
- Finish: Gold Flash Plated

Ordering information

1-401 2 XX R G G-D

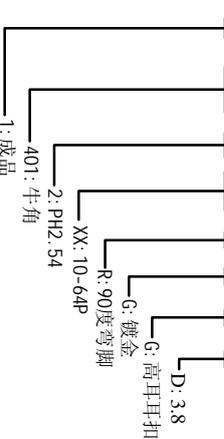

ITEM	PART NO	SPECIFICATION	QTY
1	2-4012XX	2.54mm 牛角型版本NP	1PCS
2	2-4012EG	高耳耳扣	2PCS
3	5-0064x160R-G	0.64四方镀金针,90度长16.0	NPCS
4	5-0064x210R-G	0.64四方镀金针,90度长21.0	NPCS

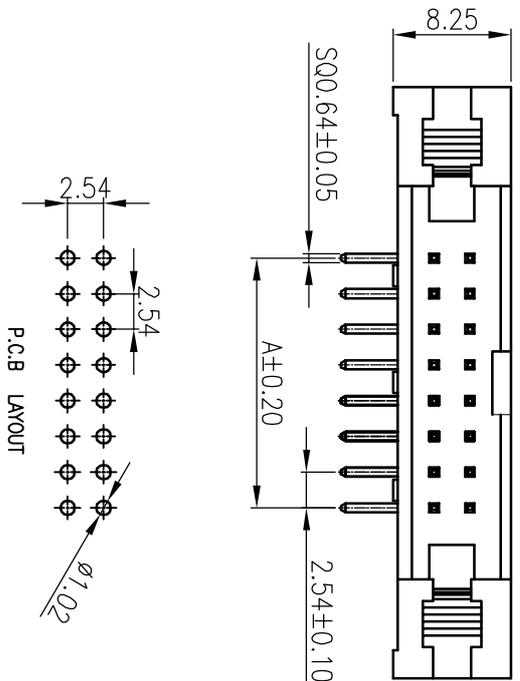

TOLERANCE UNSPECIFIED:

X	±0.30
XX	±0.25
XXX	±0.15
XXXX	±0.05
XX'	±1'
XX''	±1''



UNIT: mm [inch]
SCALE: 1:1 SIZE: A4

PROJECTION:	CHECKED BY: 何智权	DATE: 10-5-31	PART NAME: 2.54mm Shrouded Header
DRAWN BY: 陈雄军	DATE: 10-5-31	PART NO: 1-4012XXRG-038	TITLE: 成品规格图
APPROVED BY: 陈宗渊	DATE: 10-5-31	DRAW NO: A-1-4012XXRG-038	MOLD NO:
SCALE: 1:1	SIZE: A4	SHEET: 1 OF 1	

